

2BV系列液环真空泵及压缩机

2BV series liquid ring vacuum pumps

分为2BV2/5和2BV6设计

Available in 2BV2/5 and 2BV6 designs

2BV2/5结构紧凑, 泵电机同轴集成化设计, 降低安装成本, 降低噪音

2BV2/5: compact structure via integrated rotor on motor, which reduces installation footprint and noises

标配汽蚀保护孔, 保证任何工况下安全运行



Standard cavitation protection holes to ensure safe operation under any working conditions

2BV6 采用连接轴设计, 配置防爆电机, 应用危险环境

2BV6: lantern design for coupling connection between pump and motor, which can be configured with explosion-proof motor for application in hazardous environment

多种材质可选, 标配机械密封、不锈钢转子, 叶轮动平衡精度可达 ISO G2.5

Various material configurations, standard mechanical seal, stainless steel rotor with dynamic balancing level up to ISO G2.5

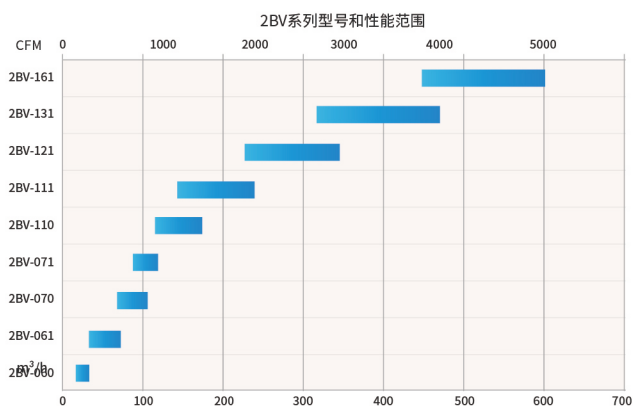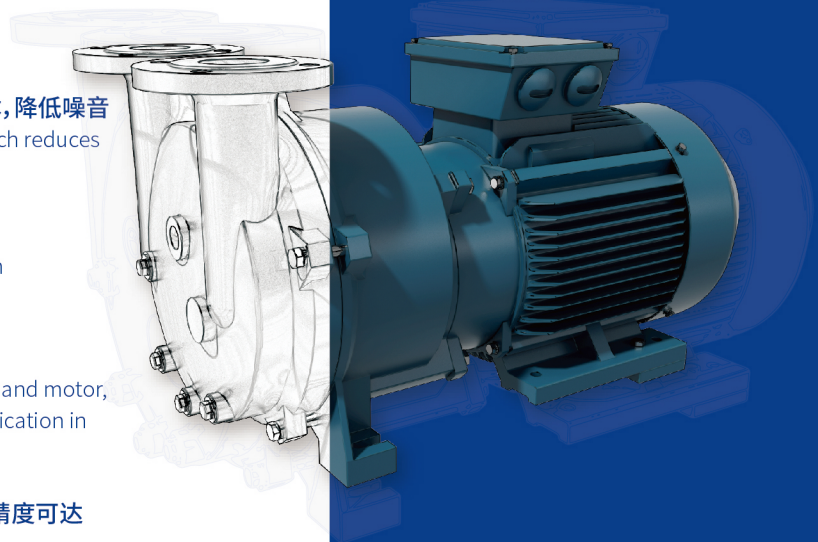

吸入压力范围: 33~1013mbar(a)

Inlet pressure range: 33~1013mbar(a)



气量范围: 27~500m³/h

Capacity range: 27~500m³/h

