


CL系列锥体液环真空泵

CL series cone liquid ring vacuum pumps

- 多种安装点, 皮带传动/弹性联轴器的传动
Multiple connection methods, belt drive/elastic coupling drive
- 叶轮叶片安装有围带, 更高耐久性和极强的抗侵蚀能力, 坚固而且可靠
The impeller blade is installed with ribs, which enables higher durability and strong erosion resistance, strong and reliable
- 多种密封形式和材质可供选择, 以面对更复杂的工况
Various sealing concepts and materials are available to face more complex working conditions
- 叶轮偏于泵的下部, 静止时液位较低, 启动电流小
The impeller is eccentrically located on lower side of the pump, leading to low standby liquid level and low starting current

CL系列液环真空泵

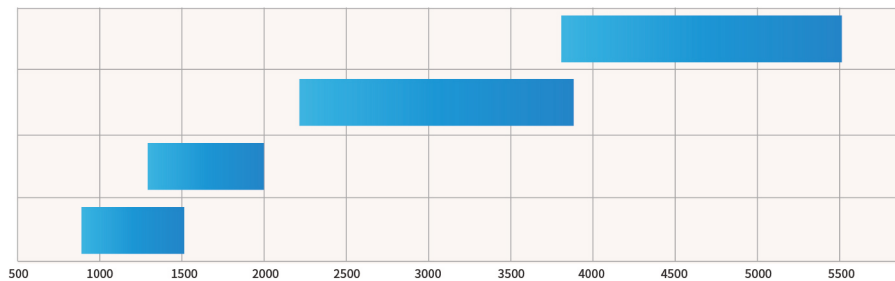

吸入压力范围: 33~1013mbar(a)
Inlet pressure range: 33~1013mbar(a)



气量范围: 600-6000m³/h
Capacity range: 600-6000m³/h