



DLV系列双系液环真空泵

DLV series 2-stage liquid ring vacuum pumps

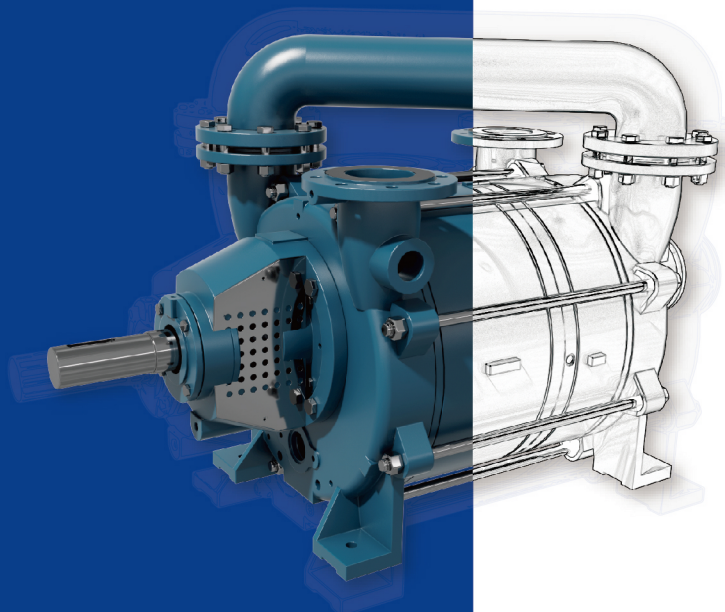

- **更宽的吸入压力范围**
Wider inlet pressure range
- **双级叶轮压缩, 单级叶轮压缩比小, 压差小, 高真空 (<120mbarA) 工况下, 气量衰减量降低 25%, 同样节能约20%**
Lower compression ratio from 2-stage impeller leads to low pressure difference. On high vacuum (< 120mbarA) working condition, the capacity degrading is improved by 25% and about energy saving 20% achieved
- **符合API 681 双支撑设计, 性能运行稳定, 噪音低**
Compliant with API 681 dual-support design, stable performance and low noise
- **集装式机械密封搭配精密铸造不锈钢叶轮, 满足严苛的应用环境**
Packaged mechanical seals with investment casting stainless steel impeller satisfy harsh applications
- **叶轮动平衡精度可达ISO G2.5**
Dynamic balancing of rotor up to ISO G2.5

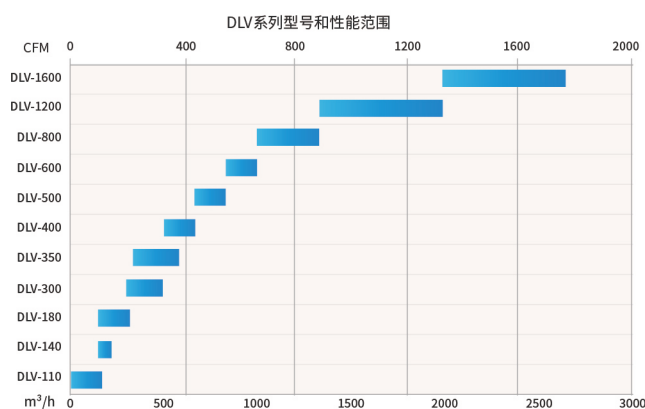

 **吸入压力范围: 33~1013mbar(A)**
Inlet pressure range: 33~1013mbar(A)

 **气量范围: 110-3000m³/h**
Capacity range: 110-3000m³/h